


- ABS Octopus -

Downstream demand valve

Versatile design allows proper function when rightside up or upside down.

Unique 120° angle between hose and mouthpiece.

Custom quick-release mounting clip keeps the ABS properly located.

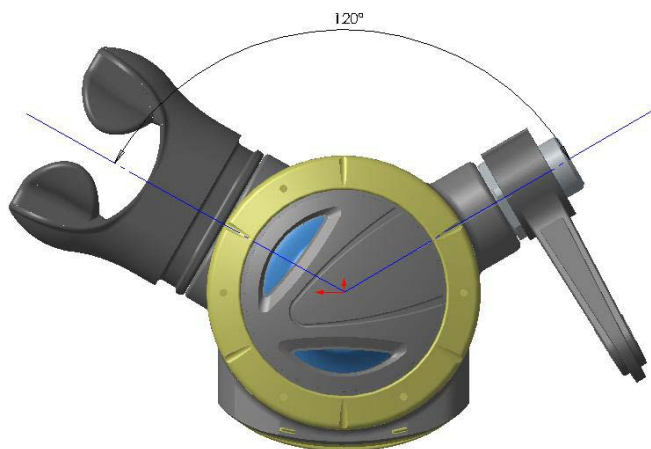

Opening effort : between 2,5 to 5 mbar

No tool required to reach the internal second stage.

Box bottom : made of A.B.S

Cover : Polyurethane

Mouthpiece, Exhaust valve, seat, diaphragm : silicone

Adjustable crown : nickel-copper

MP hose : Length : 1000 ±5 mm
Color : yellow

ABS weight : 342 g

Nitrox Compatibility : 40 % O₂ max.

Breathing performance :

Work of breathing **W = 1.7 J/litre** in the following conditions :
RMV : 62.5 l/min, Depth : 50 m, HP = 50 bar.



References for products & kits :

ABS regulator : 116920
MP hose : 124566
Service Kit ABS : 128014